


SMT Power Inductor

HAL1345 Type


Features

- RoHS compliant.
- Low profile, SMD type.
- High current.
- Magnetic shielded.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor applications.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.



Mechanical Dimension :

RECOMMENDED PAD PATTERNS

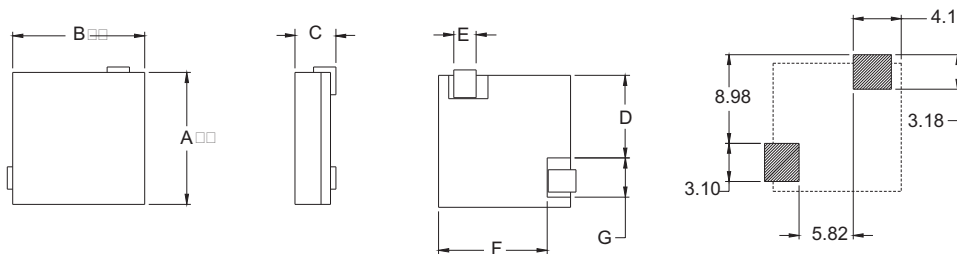

UNIT : mm/inch
 A = 12.5±0.4 / 0.492±0.016
 B = 12.5±0.4 / 0.492±0.016
 C = 4.50 / 0.177 Max.
 D = 7.75 / 0.305
 E = 2.40 / 0.094 REF
 F = 10.35 / 0.407
 G = 3.75 / 0.148

Electrical Characteristics : 25°C, 100KHz, 1V

PART NO.	Lo ¹ (uH)	Li (uH)±20%	DCR (mΩ) MAX	Isat ² (Adc)	Irms ³ (Adc)
HAL1345-0R5	0.5	0.4	1.80	30	27
HAL1345-0R9	0.9	0.8	2.50	25	22
HAL1345-1R5	1.5	1.2	3.45	18	20
HAL1345-2R2	2.2	1.9	5.20	15	15

1. Lo is the initial inductance and the tolerance of inductance is ± 20%.
2. Isat is the DC current which cause the inductance drop approximately 20% of its nominal inductance without current.
3. Irms is the DC current which cause the surface temperature of the part increase less than 45°C.
4. Operating temperature : -20°C to 105°C (including self-temperature rise).



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.
 TEL: 886-3-3591968; FAX: 886-3-3591991
<http://www.deltaww.com>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>